




Westinghouse


**Ducted Type
Air Conditioner**

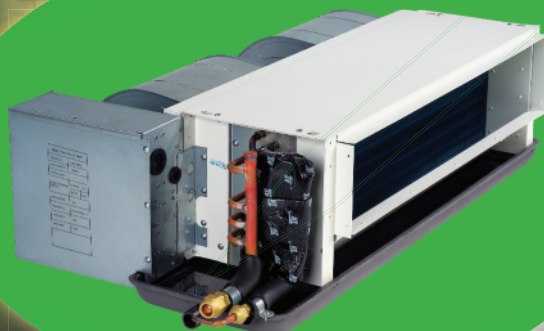

WIBXM

(Wireless Control)

**Capacity Range:
18,000 - 36,000 Btu/h**

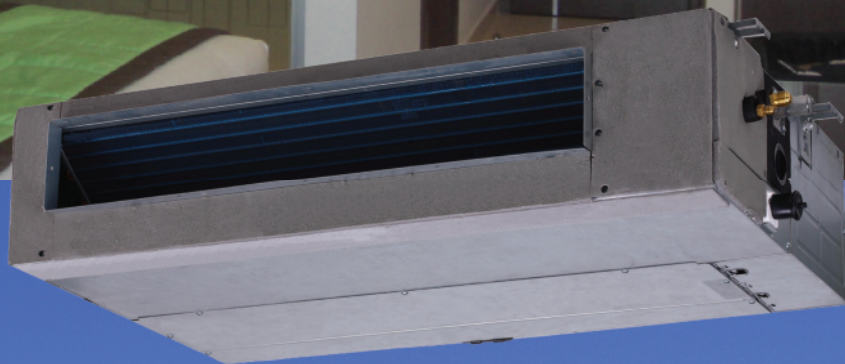

WIDXM

(Wired Control)

**Capacity Range:
18,000 - 60,000 Btu/h**

**You can be sure...
if it's Westinghouse**



Technical Specifications:

WIBXM Series:

Model Number			WIBXM-18SVW2	WIBXM-24SVW2	WIBXM-36SVW2
Nominal Capacity		Btu/h	18,000	24,000	36,000
Power Supply		V/ Ph / Hz	208 - 230 V / 1 Ph / 60 Hz		
Air Volume		CFM	600	800	1,100
Indoor External Static Pressure		Pa	25	25	37
Noise Level		dB(A)	45	50	50
Fan Motor	R.L.A.		0.40	0.65	0.80
	Speed		3	3	3
Coil	Type		Inner Grooved Tube		
	Row		2	2	3
	NOC		4	6	6
	Size (Inch)		8 x 27	12 x 35	12 x 35
Connections	Drain	mm (Inch)	19.05 (3/4)		
	Discharge / Liquid	mm (Inch)	6.4 (1/4)	9.53 (3/8)	9.53 (3/8)
	Suction / Gas	mm (Inch)	12.7 (1/2)	15.9 (3/8)	15.9 (3/8)
Refrigerant		Type	R-22 (R-410A Compatible)		
Dimension (HxWxD)		mm	240 x 927 x 490	340 x 1169 x 590	340 x 1169 x 590
Net Weight		Kg	18	32	34

WIDXM Series:

Model Number			WIDXM-18SVA2	WIDXM-24SVA2	WIDXM-36SVA2	WIDXM-48SVA2	WIDXM-60SVA2
Nominal Capacity		Btu/h	18,000	24,000	36,000	48,000	60,000
Power Supply		V/ Ph / Hz	208 - 230 V / 1 Ph / 60 Hz				
Air Volume		CFM	600	800	1,200	1,600	1,800
Indoor External Static Pressure		Pa	70	70	80	100	100
Noise Level		dB(A)	44	44	46	46	47
Fan Motor	R.L.A.		0.40	0.65	0.80	1.00	1.00
	Speed		3	3	3	3	3
Coil	Type		Inner Grooved Tube				
	Row		3	4	4	4	4
	NOC		4	6	8	8	8
	Size (Inch)		10 x 29	10 x 29	13 x 37 ½	15 X 40½	15 X 40½
Connections	Drain	mm (Inch)	25 (1")				
	Discharge / Liquid	mm (Inch)	6.4 (1/4)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)	9.53 (3/8)
	Suction / Gas	mm (Inch)	12.7 (1/2)	15.9 (3/8)	19 (3/4)	19 (3/4)	19 (3/4)
Refrigerant		Type	R-22 (R-410A Compatible)				
Dimension (HxWxD)		mm	210 x 920 x 635	270 x 920 x 635	270 x 1140 x 775	300 x 1200 x 865	300 x 1200 x 865
Net Weight		Kg	26	29	42	49	49

Specifications and illustrations subject to change without notice and without incurring obligations.